

# Embedded System

## LIGHT Series



### LIGHT Chassis without top-cover



M/B information: ( Please refer to M/B specification )

**Application :**  
Thin Client, Network device, Set-Top Box, VPN, VOIP and POS system

**Technical Data :**

• Dimension	48.5 H x 234 W x 175 D mm
• Material	Aluminum + Plastic ( Silver Cover )
• Color	Blue / Silver
• Weight	1 Kgs ( Incl. M/B )
• Storage Space	1 x 2.5" HDD
• LED Light	Power / Network / HDD
• Front Connector	1 x USB, Mic-in, Lin-out

M/B Model	Description	Operation Temp.	
		CF	HDD
CV700A	3 LAN	60°C	40°C
CV700C	4 COM Ports	60°C	40°C
CV763A	2 PCMCIA Slot / 4 LAN	60°C	40°C
MV700A	Twin-view / Video-in	60°C	45°C
CI852A	4 LAN	60°C	45°C
CI852C	4 COM ports	60°C	45°C
SI852A	4~16 Video-in	60°C	45°C
M1853AW	2 IEEE1394 / DVI / TV-Out / Wide range DC-IN	60°C	45°C
CI270CW	4 COM ports / LVDS / DVI / Wide range DC-IN	55°C	45°C
MI270AW	2 COM ports / LVDS / TV-Out / Wide range DC-IN / Video-in	55°C	45°C


**Optional Module**

Wireless Lan	Chip: RALINK / VIA, MINI PCI Interface, 802.11g Standard Driver: Win98, ME, 2K, XP, Linux, 128bit WEP Encryption Support
56K Modem ( CX )	Chip: Conexant, USB Interface, Driver: Win98,ME,2K,XP,Linux
ADSL	Chip: Conexant, ANSI T1.413 Issue 2 ITU-T G.992 ( G.dmt ) and G.992.2 ( G.lite ) Annex A,B. Driver: Win98, ME, 2K, XP, Linux

**Optional Accessory :**

- Wall mount kit

**Dimension**

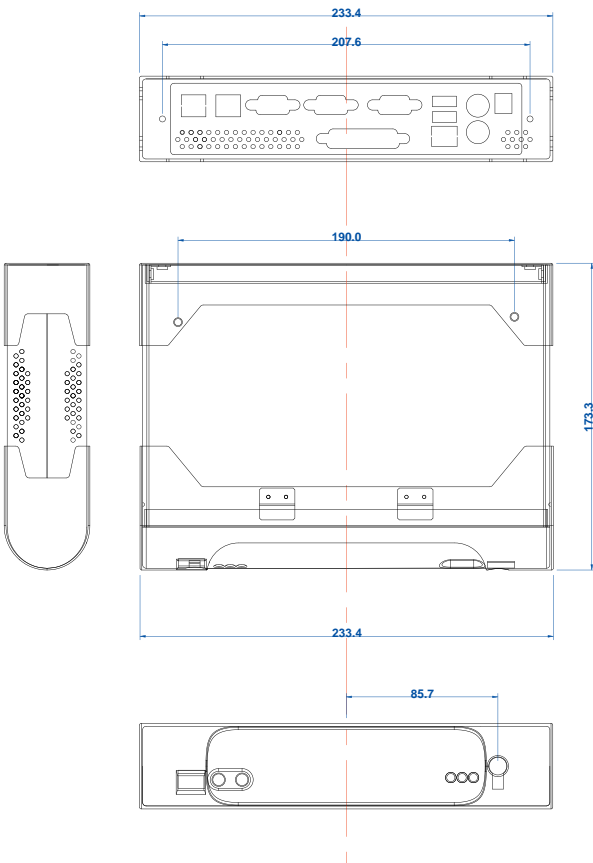

Networking

POS / Automation

DVR

Multimedia

Embedded System