

CIO116

Digital I/O Board

CIO116: 8DI 8DO Board

Introduction:

Optocouple isolated for all DI/DO

Top



Features:

- Contact rating: DC 60V / 50mA max
- Isolation Protection: 5000Vrms at 1 minute
- Switch speed: under 30KHz


Option:

- CIO116-G (SMBus interface)

Specification:

Function	8 Digital Input + 8 Digital Output
Interface	2*2 x 5 pin 2.0 wafer connector
Output	TB connector
Operating Temperature	-40°C ~ +85°C
Dimensions	84 x 35 mm

Mechanical Drawing:

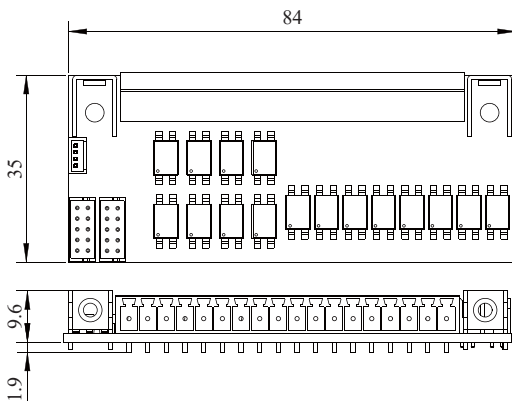

Ordering Information:

7G5905-1802001-0 CIO116-B-001

Cable information:

6G6001-0105-0100 L=15cm, 2.0 2 x 5 to 2.0 2 x 5

