


CC007

USB2.0 to 4 port RS232 / RS485 / RS422 converter board

Introduction:

CC007 supports USB 2.0 Specification High Speed (480Mbps) & Full Speed (12Mbps) interface & converts to 4 x RS-232 / RS-485 / RS-422 Serial with the transfer Data Rate & Baud Rate

Top

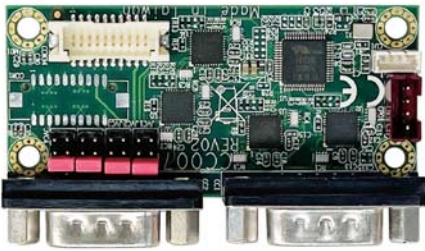

Features:

- 4 x RS232 / 422 / 485 switched by SW
- Pin 9 RI / 5V / 12V selectable by jumper


Option:

- RS232 only

Specification:

Type	USB 2.0 to RS232 / 422 / 485
Input	1.25mm, 1 x 4 pin
Output port	D-Sub x 2, 2 x 10pin pinheader (need cable)
Operating Temperature	-40°C ~ +85°C
Dimensions	65 x 30 mm

Mechanical Drawing:

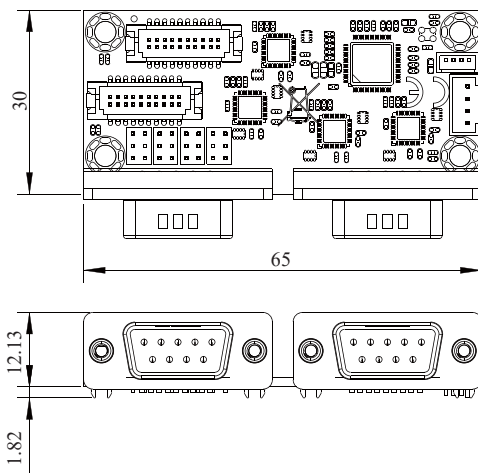


Ordering Information:


7S5905-2502001-0

Cable information:


6G6001-2041-0200 L=20cm, DF13 2x10/DB9x2

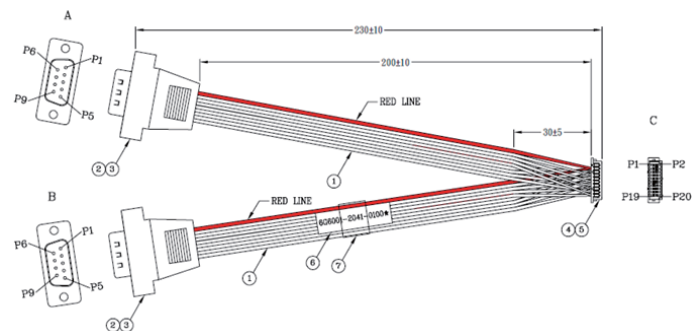

6G6002-8018-0100 L=20cm, 4p/1.25 to 4p/1.25

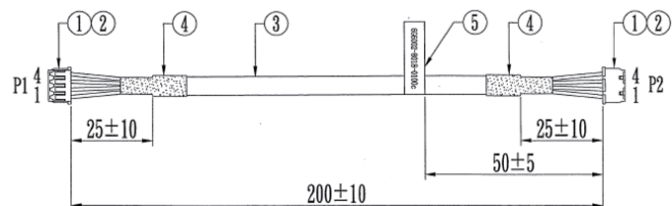

6G6003-7347-0100 2.0 1*4/2.0 1*4, L=15cm

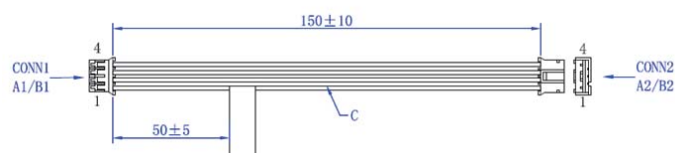

Specification are subject to change without prior notice. ODM / OEM is available.