



STAR 15.1" PPC

15.1" IP66 / 67 Fanless Panel PC with Intel® Atom™ Bay Trail Processor

Features:

- 15.1" LCD with resistive touch screen
- Intel® Atom™ Bay Trail J1900 / E3825 / E3845 SoC
- DDR3L 2GB / 4GB on board
- M12 IO connectors
- Aluminum housing



Specifications :

Motherboard	2I385HW		
CPU	Intel® Atom™ Bay Trail J1900 / E3825 / E3845		
Chipset	Intel Bay Trail SoC		
Memory	DDR3L 2GB / 4GB		
Storage	mSATA, HDD / SSD*		
Expansion slots	1 x Full-size Mini PCIe (PCIe / USB / mSATA) 1 x Half-size Mini PCIe (USB / mSATA)		
M12 I/O ports (Selectable)	Network	2 x Intel GbE	
	USB	4 x USB 2.0, 1 x USB 3.0	
	Serial ports	4 x RS232	
	Display	1 x VGA	
Optional Modules & Function	GPS, Bluetooth, PoE, WiFi, 4G LTE, Isolated COM, battery UPS *SATA Kit, *VESA Mount Kit, * External power adapter		
Certification	CE / FCC, EN50155		
OS Support	Windows® 10 IOT (64bit), Windows® 8.1 (64bit), Windows® Embedded 8 Standard (64bit), Windows® 7 (32 / 64bit), Windows® Embedded Standard 7 Runtime, Ubuntu 14.10 above, Fedora 25 above, Debian 8 above, CentOS 7.3 above, Mint 18.1 above		

Mechanical

Dimensions	385W x 317.5D x 56.5H mm
Weight	4.89 kg
Mounting	VESA mount & Stand (optional)

Power

DC input	+9~36V
AC input	External adapter 100 / 240V, AC-DC (optional)


LCD Display & Touch

Display Type	15.1 inch 4:3
Max. Resolution	1024 x 768
Viewing Angle	80(U) 80(D) 80(R) 80(L)
Luminance (cd/m2)	450
Contrast Ratio	800:1
Touch Type	Resistive Touch Screen

Environment

Operating Temp. (100 % CPU usage)	-20°C to +60°C with mSATA / SSD 0°C to +50°C with HDD
Storage Temp.	-20°C to +70°C
Relative Humidity	95% @ 40°C, non-condensing
IP Rating	IP66 / IP67 Compliant

Dimension

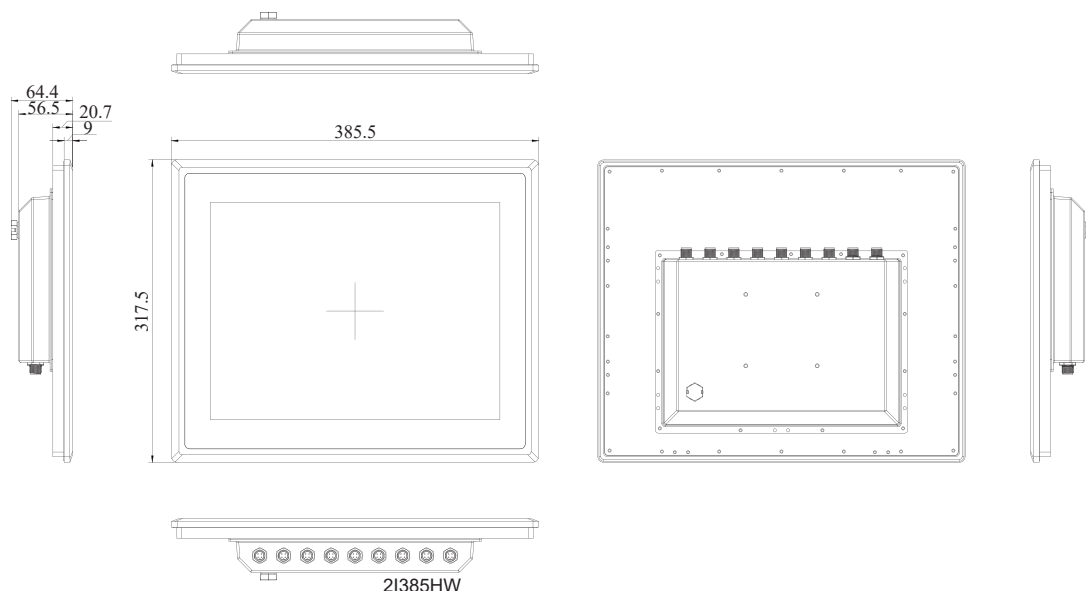

Specification are subject to change without prior notice. ODM / OEM is available.