



SUPER 15.1" PPC

15.1" Fanless Panel PC with Intel® Atom™ Bay Trail Processor

■ Features:

- 15.1" LCD with resistive touch screen
- Intel® Atom™ Bay Trail J1900 / E3825 / E3845 SoC
- DDR3L SODIMM, Max 8GB
- 2 x GbE, 4 x COM, DVI, VGA, 4 x USB
- Wide Range 9~36V DC input
- Plastic (ABS) housing

■ Specifications :

Motherboard	3I385CW	
CPU	Intel® Atom™ Bay Trail E3845 1.91 GHz (Quad Cord)	
Chipset	Intel Bay Trail SoC	
Memory	DDR3L SODIMM, Max 8GB	
Storage	mSATA, HDD / SSD*	
Expansion slots	1 x Full-size Mini PCIe (PCIe / USB / mSATA)	
	1 x Full-size Mini PCIe (PCIe / USB)	
I/O ports	Network	2 x Intel GbE
	USB	4 x USB 3.0
	Serial ports	4 x RS232 / 422 / 485
	Display	1 x VGA, 1 x DVI
Optional Modules & Function	GPS, Bluetooth, PoE, WiFi, 4G LTE, Isolated	
	COM, battery UPS	
	*SATA Kit, *VESA Mount Kit, * External power adapter	
OEM I/O	3 Layers back panel (add 2* COM + DIO)	
Certification	CE / FCC, EN50155, E13	
OS Support	Windows® 10 IOT (64bit), Windows® 8.1 (64bit), Windows® Embedded 8 Standard (64bit), Windows® 7 (32 / 64bit), Windows® Embedded Standard 7 Runtime, Ubuntu 14.10 above, Fedora 25 above, Debian 8 above, CentOS 7.3 above, Mint 18.1 above	

■ Mechanical

Dimensions	404.1W x 335D x 68.7H mm
Weight	3.5 kg
Mounting	VESA mount & Stand (optional)

■ Power

DC input	+9~36V
AC input	External adapter 100 / 240V, AC-DC (optional)


■ LCD Display & Touch

Display Type	15.1 inch 4:3
Max. Resolution	1024 x 768
Viewing Angle	80(U) 80(D) 80(R) 80(L)
Luminance (cd/m2)	450
Contrast Ratio	800:1
Touch Type	Resistive Touch Screen (Capacitive - Option)

■ Environment

Operating Temp.	-20°C to +60°C with mSATA / SSD
	0°C to +50°C with HDD
Storage Temp.	-20°C to +70°C
Relative Humidity	95% @ 40°C, non-condensing
IP Rating	Front panel IP65 Compliant

■ Dimension

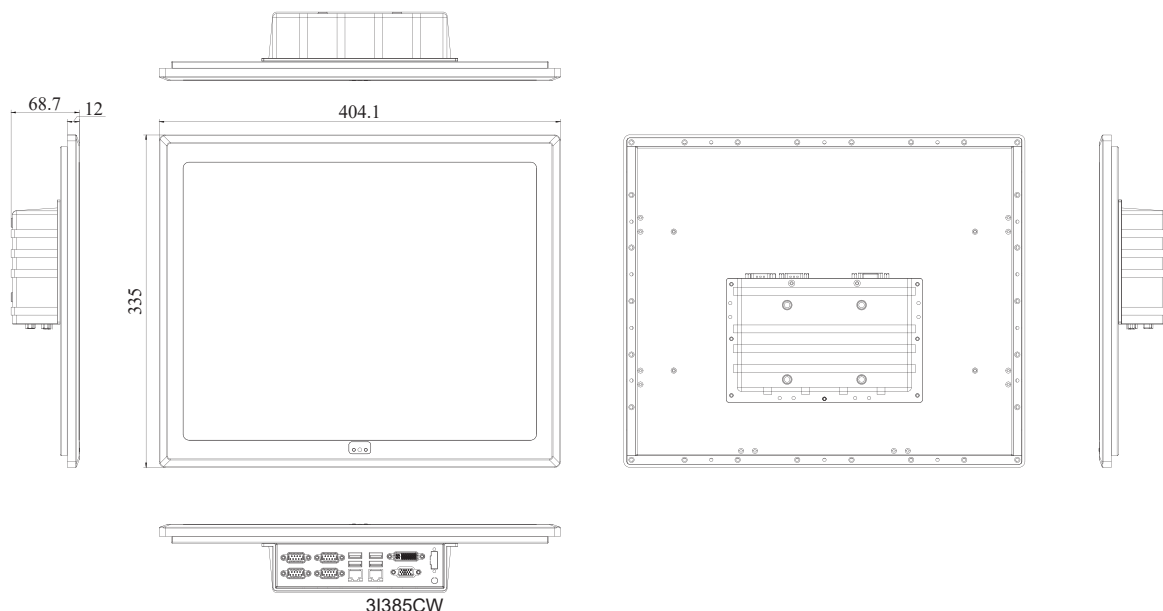

Specification are subject to change without prior notice. ODM / OEM is available.