

CIO108

Digital I/O Board

CIO108: 4DI 4DO Board

Introduction:

SSR for 4DI & SSR for 2 DO, relay for 2DO (4 SSR DI / 2 SSR DO + 2 delay DO)

Top



Features:

- Power Relay Contact rating: DC 30V / 3A max, AC 125V / 3A max
- SSR Contact rating: DC 60V / 2A max, AC 60V / 2A max
- Optocouple for Digital Input / Output Isolation, Contact rating: DC 60V / 50mA max


Option:

- DI voltage 24V, 48V, all 8DI, all 8DO

Specification:

Function	4 Digital Input + 4 Digital Output
Interface	2 x 5 pin 2.0 wafer connector
Output	TB connector
Operating Temperature	-40°C ~ +85°C
Dimensions	76.71 x 35 mm

Mechanical Drawing:

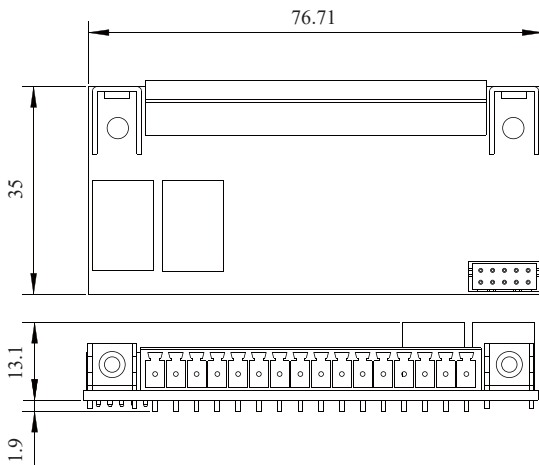

Ordering Information:

7G5905-1701002-0 CIO108-4140-12V-002

Cable information:

6G6001-0105-0100 L=15cm, 2.0 2 x 5 to 2.0 2 x 5

