


# DM002

## Evaluation Carrier Board for 2I385PW / 2I847PW

### ■ Features :

- Flexible interface for verification
- Expedite customer's carrier board development
- Dimension: Pico-ITX (102 x 73 mm) form factor
- Interface: 1 x mini PCIe, 1x SIM holder, 1 x USB 3.0, 4 x USB 2.0 (M12 x 2), 2 x GbE (M12), PWR LED, 4 x COM (2 x M12 + 2 x internal), 1 x VGA (M12), 1 x mini HDMI, Line-out / Mic-in (wafer)]

### Bottom

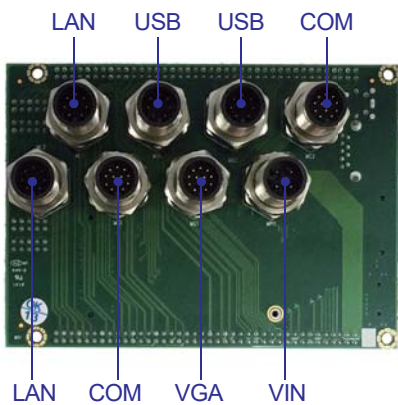

### TOP



### ■ Specification:

MODEL	DM002	
Compatible SBC	2I385PW / 2I847PW	
IO Connector	DVI / HDMI	1 x mini HDMI Type C
	VGA	1 (M12)
	USB	4 x USB 2.0 (2 x M12)
		1 x USB 3.0 (Type A)
	Serial	2 x COM (wafer)
		2 x COM (M12)
	Ethernet	2 x M12
	HD Audio	Line-out, Mic-in (wafer)
LED	Power	
DI / DO	MB Function	
Expansion	Mini PCI Express	1 (Full-size) PCIe / USB
	SIM card Holder	1 (push-push)
	80-pin Connector	2
	MicroSD card Holder	N/A
Power Input	Corresponding to M/B power DC-IN +9~36V	
Dimension	102 x 73mm (Pico-ITX 2.5")	
Operation Temperature	-20°C ~ 70°C	