


3I640DW


3.5" Embedded IPC Board supports Intel® Elkhart Lake ATOM® x6413E / J6412 CPU
 2 x HDMI, eDP, 5 x Intel 2.5 Gb Ethernet, 8 x USB,
 2 x COM, 1 x M.2, 1 x Mini PCIe, 1 x Nano SIM, 4DI / 4DO

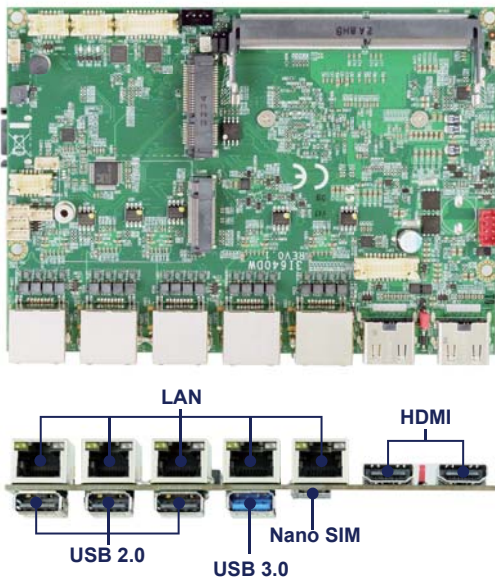

Features:

- Intel® Elkhart Lake ATOM® x6413E / J6412 CPU
- 1 x DDR4 SODIMM, Max. 32GB
- Independent display: 2 x HDMI, eDP
- 5 x Intel 2.5 GbE LAN, 1 x USB 3.0, 7 x USB 2.0
- 2 x COM, 1 x Mini PCIe, 1 x M.2, 1 x Nano SIM
- 4DI / 4DO, TPM 2.0

Dimensions: (Unit:mm)

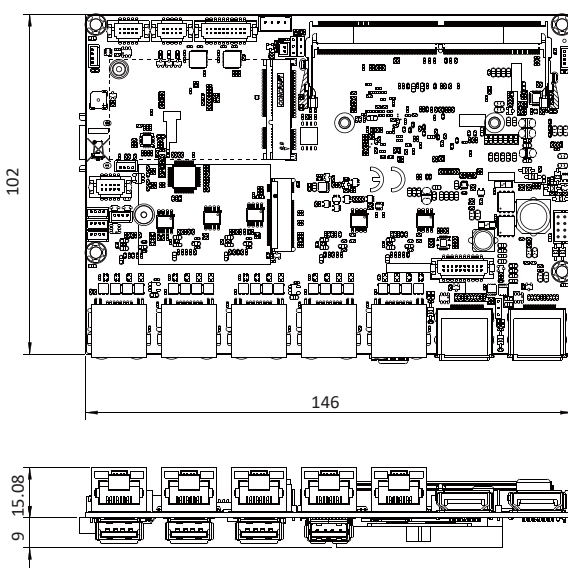

Specifications :

- CPU
Intel® Elkhart Lake ATOM® x6413E / J6412 CPU
- MB Chipset
Intel® Elkhart Lake SoC
- Graphics
Intel® HD Graphics, Support DirectX 12.1 & OpenGL 4.5
- System Memory
1 x DDR4 SODIMM, Max. 32GB
- Storage
1 x M.2 B Key Type 2242 SATA-SSD
1 x SATA (share with mSATA)
- BIOS
Insyde UEFI BIOS
- Display
2 x HDMI (OEM to DP), eDP
- TPM
TPM 2.0 (Firmware) ; OEM Optional to Hardware TPM 2.0
- LAN
5 x Intel 2.5 GbE I225 / I226 (external)
- Audio (OEM)
High Definition Audio Specification, Support Line-out / Mic-in / Line-in Two channel Class D Audio Amplifier (OEM)
- Expansion Interface
1 x M.2 B Key Type3042 (SATA / USB 2.0 / USB 3.0)
1 x Mini PCIe (USB 2.0 / PCIe-OEM to mSATA)
1 x Nano SIM

Expansion Options

CN064	M.2 B key 2242 to M.2 E Key 2230, WiFi 6 + BT
CN067	M.2 B key 2242 to M.2 B Key 2252, 4G / 5G (3.7V by BOM Control)
CN059	USB to Line-out / Mic- in
CC007	USB to 4 port COM
CIO116G	SMBus to 8DI + 8DO
PW351	1 port PoE PSE
PW352	2 port PoE PSE
PW301	802.3AF / AT PD module
PW205	Wide Range power board (9~36V) with power Ignition on/off delay
PW206	12V / 24V DC to DC Redundant Power Board
PW022	Wide Range power board (24V / 48V) for ATOM series MB
DP001	eDP to VGA
eDP003	eDP to DVI
eDP004	eDP to HDMI
eDP001	eDP to LVDS (OEM)

- USB
1 x USB 3.0 (external) ; 3 x USB 2.0 (external) ; 4 x USB 2.0 (internal)
- Serial IO
2 x RS232 / 422 / 485 (internal)
*COM1, COM2 pin9 5V / 12V (option)
- GPIO
Hardware digital Input & Output, 4 x DI / 4 x DO
- WDT
Hardware Watch Dog Timer, 0~255 sec programmable
- SMBus
1 x SMBus
- I²C
I²C
- Power Input
DC-IN +12V or Wide Range +9~36V
- Dimension
3.5" (146 x 102 mm)
- Operation Temperature (100 % CPU Usage)
-20°C~70°C (100 % CPU Usage)
- Operation Humidity
5~95%, non-condensing
- Chassis (OEM I/O Expansion by request)
Box PC: SKY 3, TASK, TWITTER
- OS Support
Windows® 10 IOT ; Windows® 11 IOT
Ubuntu 22.04 above, Fedora 36 above