


DK002

Evaluation Carrier Board for 2I385PW / 2I640PW


Features :

- Flexible interface for verification
- Expedite customer's carrier board development
- Uses 3.5" SBC form factor
- Interface: 2 x mini PCIe, 2 x SIM holder, 1 x USB 3.0, 4 x USB 2.0, 1 x PS2 KB / MS, 4 x COM, 1 x SMBus
Line-out, Mic-in, 2 x GbE, 1 x VGA, 1 x HDMI, PWR, DC-Jack IN, PWR / HDD / LAN LED

TOP

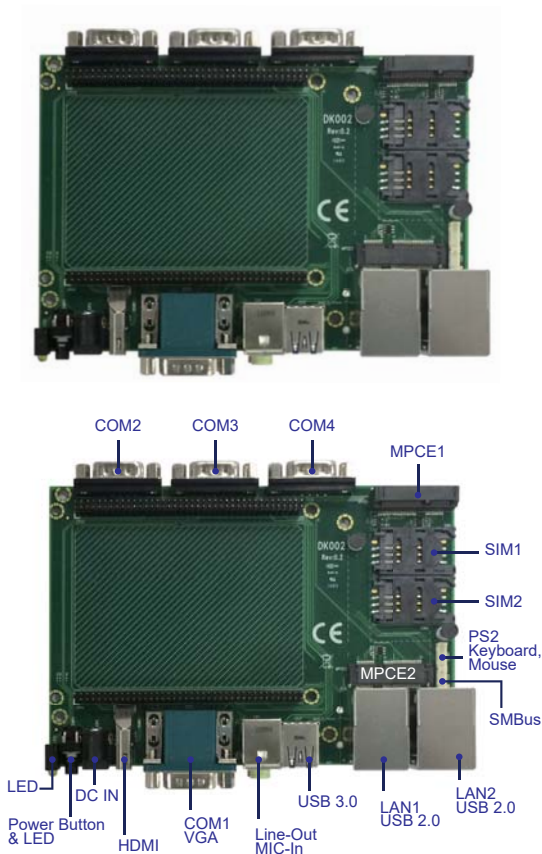

Back Panel

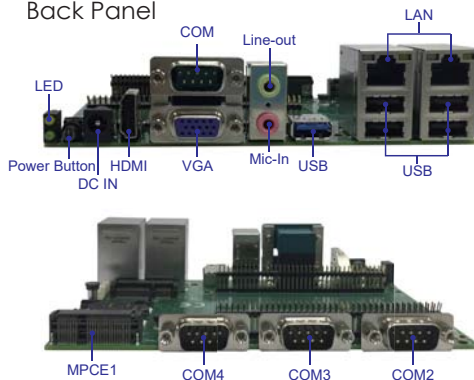

Specification:

MODEL	DK002	
Compatible SBC	2I385PW / 2I640PW	
IO Connector	DVI / HDMI	1
	VGA	1
	USB	1 x USB 3.0, 4 x USB 2.0
	Serial	4 x COM (2I385PW), 2 x COM (2I847PW)
	Ethernet	2 x RJ45 GbE
	HD Audio	Line-out / Mic-in
Expansion	LED	Power, HDD, LAN
	DI / DO	DC-Jack IN
	Mini PCI Express	2 (Full-size)
	SIM card Holder	2
Power	80-pin Connector	2
	Corresponding to M / B Power Spec	
Dimension	145 x 102 mm (3.5" SBC)	
Operation Temperature	-20°C ~ 70°C	
Operation Humidity	5 ~ 95%, non-condensing	