



SKY 2-2I110D

Compact Fanless Embedded Computer
with 11th Intel® Tiger Lake-UP3 Processor

■ Features:

- 11th Gen Intel® Tiger Lake-UP3, i7 / i5 / i3 / Celeron CPU
- 1 x DDR4 SODIMM socket, Max. 32GB
- Independent display: HDMI
- 4 x Intel GbE LAN, 3 x USB 3.2, 2 x USB 2.0, 2 x COM
- 2 x M.2, 1 x Nano SIM

■ Specifications :

Motherboard	2I110D
CPU	11th Gen Intel® Tiger Lake-UP3, i7 / i5 / i3 / Celeron CPU
Chipset	Intel Tiger Lake-UP3 SoC
Memory	1 x DDR4 SODIMM socket, Max. 32GB
Storage	M.2-SSD*
Expansion slots	1 x M.2 B key Type 3042 (PCIe x2 / USB 3.2 / 2.0) 1 x M.2 M key Type 2242 (PCIe x4 / SATA), Support NVMe
I/O ports	Network 4 x Intel GbE (1 x I219LM + 3 x I225) USB 3 x USB 3.2, 2 x USB 2.0 Serial ports 2 x RS232 / 422 / 485 Display 1 x HDMI SIM 1 x Nano SIM (M.2 B key, Type 3042 (NGFF1))
Optional Modules & Accessory	GPS, Bluetooth, PoE, WiFi, 4G / 5G LTE, Isolated COM, battery UPS, DI / DO, Video Input *VESA Mounting Kit, DIN Rail Mounting Kit, *Wall Mount Kit
OS Support	Windows® 10 IOT, Windows® 11 IOT Ubuntu 22.04 above, Fedora 36 above

■ Mechanical

Dimensions	141W x 111.2D x 71.9H mm
Weight	1.25 kg
Mounting	VESA Mount* (VESA 75), DIN-Rail Mount*, Wall Mount*

■ Power

DC input	+12V
AC input	External adapter 100 / 240V AC-DC 60W (optional)


■ Environment

Operating Temp. (100 % CPU usage)	-20°C to +60°C (Core i7 1185GRE)
Storage Temp.	-20°C to +70°C
Relative Humidity	95% @ 40°C, non-condensing

■ Certification

CE / FCC class A

■ Dimension

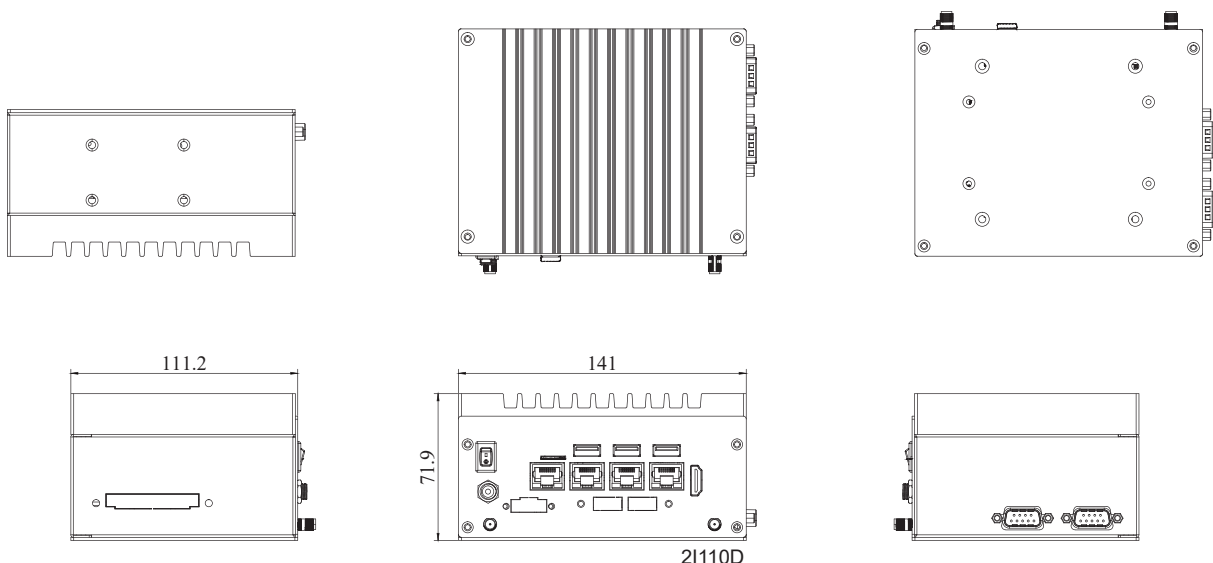

Specification are subject to change without prior notice. ODM / OEM is available.