


M504B

Mini PCIe to 4 Port Isolated RS232 / RS485 / RS422 COM board

Introduction:

F81504U PCIe bridge to quad serial port controller

Top

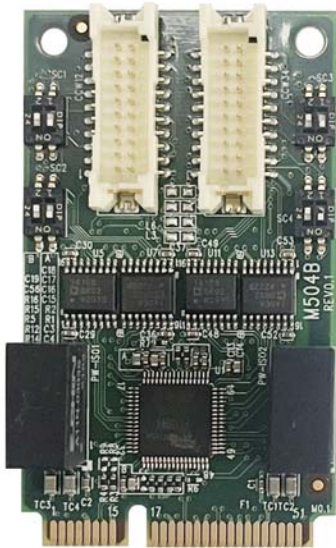


Features:

- PCI Express base spec 1.1 compliant
- Support hot plug controller
- Provide 4 fully functional UART
- 1.8V, and 3.3V operation
- Support device drivers for Windows & Linux
- Design Guarantee -40°C ~ 85°C Industrial Temperature Range
- Robust ESD Protection: ±15kV ESD Protection (IEC 61000-4-2 Air Gap ; ±8kV contact)

Specification:

Type	Mini PCIe to 4 Isolated RS232 / RS485 / RS422
Interface	PCIe
Output	2*2 x 10pin wafer connector
Operating Temperature	-40°C ~ +85°C
Dimensions	30 x 50.95 mm

Mechanical Drawing:

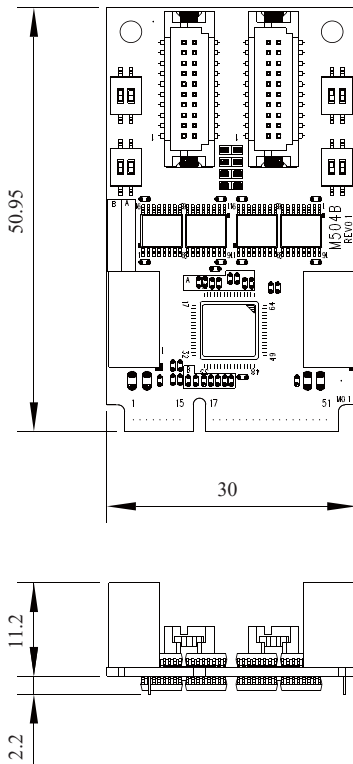

Ordering Information:

7G5905-1540001-0 M504B-001

Cable information:

6G6001-2041-0200 L=20cm, DF13 2x10/DB9x2

