

PW505

Isolated wide range DC power board with ignition on/off delay

Introduction:

PW505-36 Input voltage range: 9V~36V to 12V, max 60W

PW505-75 Input voltage range: 18V~75V to 12V, max 60W

Top



Features:

- Wide Range Voltage Input
- Output voltage: 12V/5A
- Protections: Short circuit (Continuous) / Overload / Over voltage / Over temperature / Input under voltage lock-out
- 1.6KVDC I/O isolation
- CPC function control
- CPC status LED indicator


Specification:

Type	DC to DC
Input	3pin TB, DC Jack +9V~+36V
Output	12V
Operating Temperature	40°C ~ +85°C
Dimensions	45 x 73 mm

Ordering Information:


6S9102-0041003-0 PW505-001

Mechanical Drawing:

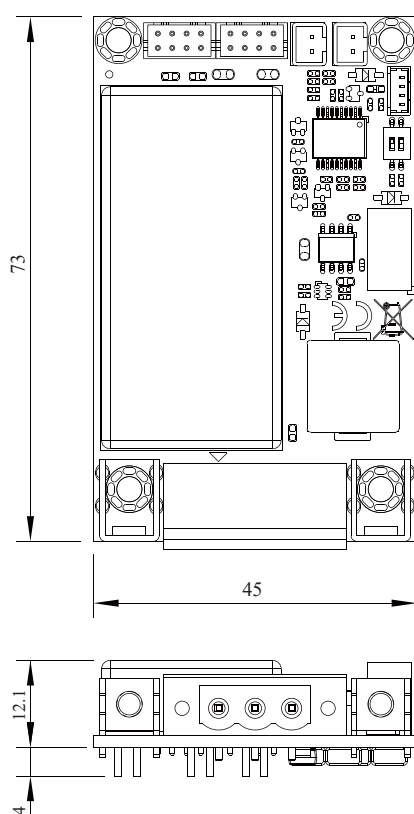


Cable Information (option):


6G6003-7375-0100 L=15cm, 2.0(8P)/2.0(8P)

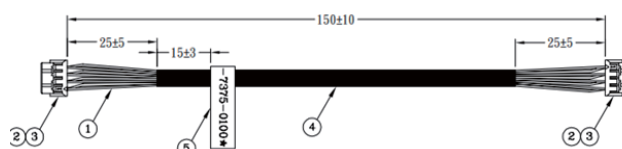

6G6002-8018-0100 L=20cm, 4p/1.25 to 4p/1.25

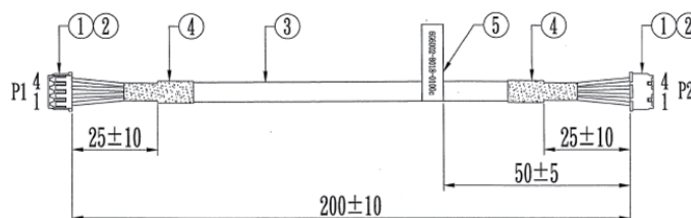

6G6003-0150-0100 L=30cm, 2.0 2*5/2.0 1*2

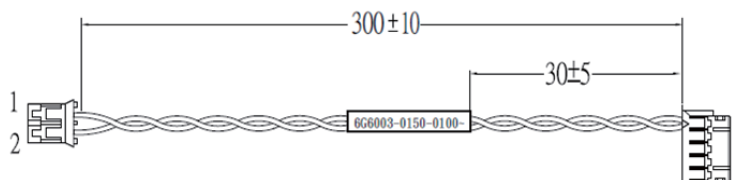

Specification are subject to change without prior notice. ODM / OEM is available.