


CIO216

8DI 8DO Board with DO PNP solution

Introduction:

Optocouple isolated for all DI/DO

Top

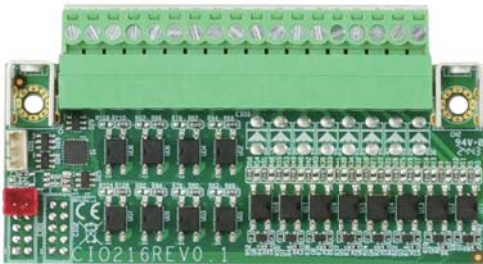

Features:

- Contact rating : DC 60V / 50mA max
- Isolation Protection : 5000Vrms at 1 minute
- Switch speed : under 30KHz


Option:

CIO216-G (SMBus interface)

Specification:


Function	8 Digital Input + 8 Digital Output
Interface	2 2 x 5 pin 2.0 wafer connector
Output	TB connector
Operating Temperature	-40°C ~ +85°C
Dimensions	84 x 35 mm

Mechanical Drawing:

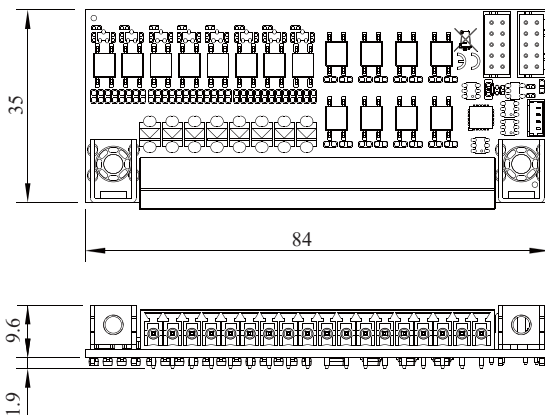

Ordering Information:

7G5905-1722001-0 CIO216-B-001

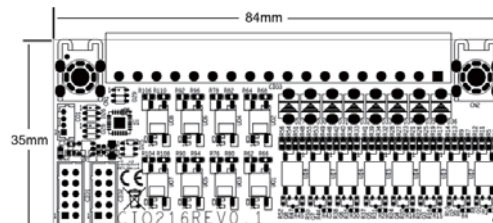

Cable information:

6G6002-8018-0100 L=20cm, 4p/1.25 to 4p/1.25

