

3I140DW


3.5" Embedded SBC supports Intel® Core™ Ultra processors (Meteor Lake-U/H) (Arrow Lake-U/H)
 1 x HDMI®, 1 x DP, 1 x LVDS, 1 x Type C 5 x Intel 2.5Gb Ethernet, 3 x M.2, 1 x PCIe golden Finger, 4DI/4DO, 3 x USB 3.2, 3 x USB 2.0, 4 x COM, 1 x Nano SIM, 2 x CANBus, Audio



Features:

- Intel® Core™ Ultra 7/5 processors
- 2 x DDR5 SODIMM (Max. 64GB)
- Multiple Independent display:
 - 1 x HDMI®, 1 x DP, 1 x LVDS, 1 x Type C DP ALT
- 5 x Intel 2.5 GbE LAN, 3 x USB 3.2 Gen 1x1, 3 x USB 2.0
- 1 x M.2 M Key, 2 x M.2 B Key, 1 x Nano SIM, 1 x PCIe
- 4 x COM, 2 x CANBus 4DI/4DO, Audio
- TPM 2.0, SMBus, I2C, I2S

Dimensions: (Unit:mm)

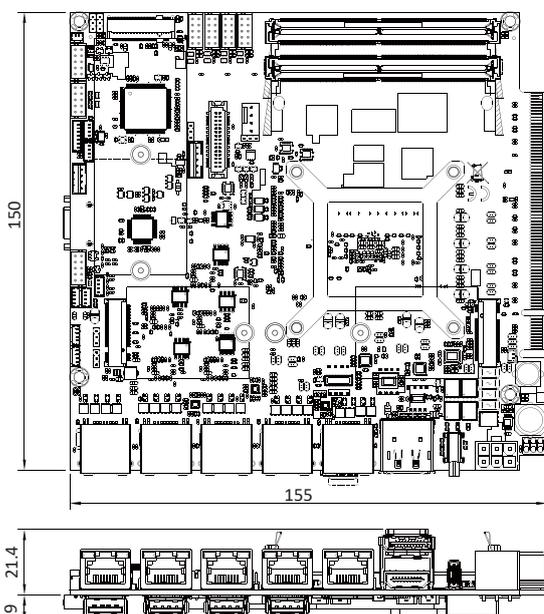

Specifications :

- CPU
Intel® Core™ Ultra 7/5 Series processors (Meteor Lake-U/H) (Arrow Lake-U/H)
- Graphics
Intel® Arc™ graphics ; Intel® UHD Graphics
- System Memory
2 x DDR5 SODIMM, Max 64GB
- Storage
1 x SATA ports 3.0 Data transfer rates up to 6.0 Gb/s (600 MB/s)
1 x M.2 M key Type 2280 (PCIe x4), Support NVMe
- BIOS
AMI UEFI BIOS
- Display
1 x HDMI® ; 1 x DP ; 1 x Type C DP ALT,
1 x LVDS / eDP (eDP for BIOS)
- TPM
Hardware TPM 2.0 ; OEM Optional to Firmware TPM 2.0
- LAN
5 x Intel 2.5GbE I226-IT (external)
- Audio
High Definition Audio Specification, Support Line-out / Mic-in / Line-in
Two channel Class D Audio Amplifier
- Expansion Interface
1 x M.2 M key Type 2280 (PCIe x 4), Support NVMe, (OEM to Type 3042)
1 x M.2 B key Type 3042 (USB 3.2 Gen 1x1 / USB 2.0) (OEM to Type 3052)
1 x M.2 B key Type 3042 (PCIe / USB 2.0)
1 x Nano SIM
1 x PCIe x 1 golden finger with U Serits CPU or
1 x PCIe x 8 golden finger with H Serits CPU

Expansion Module

Converter Card:

CN064: M.2 B Keyto M.2 E Key 2230, WiFi 6 + BT

- USB
3 x USB 3.2 Gen 1x1 (external), 1 x Type C USB 3.2
1 x USB 2.0 (external) ;
2 x USB 2.0 (internal)
- Serial IO
4 x RS232 / 422 / 485 (internal) ; eSPI
*COM1~COM4 pin9 5V / 12V (Option)
- CANBus
2 x CANBus
- SMBus / I2C / I2S
1 x SMBus ; 1 x I2C ; 1 x I2S
- GPIO
Hardware digital Input & Output, 4 x DI / 4 x DO
- WDT
Hardware Watch Dog Timer, 0~255 sec programmable
- Power Input
Wide Range DC IN +9~36V
- Dimension
3.5" Plus (155 x 150 mm) ; Weight: 205g
- Operation Temperature (100% CPU Usage)
-20°C~70°C
(under specific environmental & CPU power consumption conditions)
- Operation Humidity
5~95%, non-condensing
- Chassis (OEM I/O Expansion by request)
HAWK
- OS Support
Windows 10 / 11 (64bit)
Linux Ubuntu 22.04 / Kernel 5.15