



2NOR02

Carrier Board for NVIDIA® Jetson Orin™ NX/Nano (Super) SoM

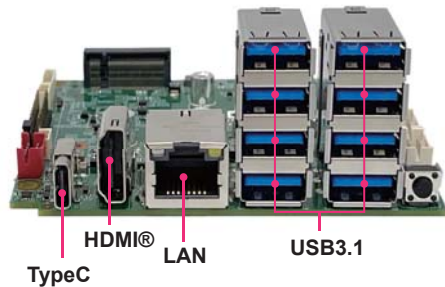

■ Dimensions: (Unit:mm)

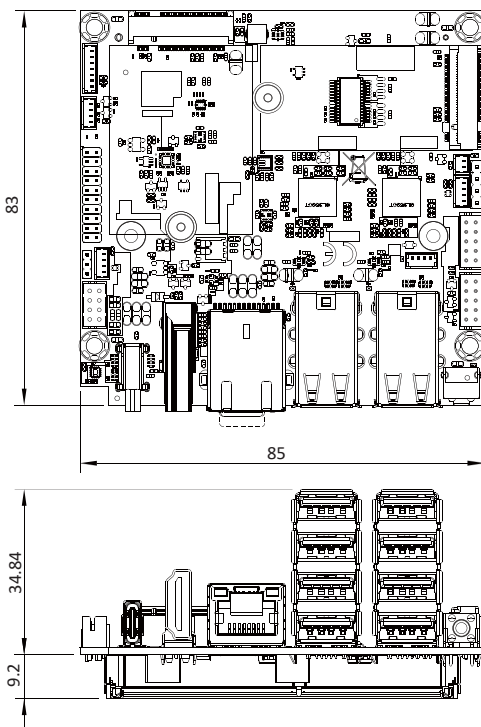

■ CPU Board:

- NVIDIA Jetson Nano(Super): 4 / 8GB LPDDR5, 20 / 40 TOPs
- NVIDIA Jetson NX: 8 / 16GB LPDDR5, 70 / 100 TOPs
- AI Accelerator: NVIDIA® Jetson Orin™ Nano (Super) / Orin™ NX

- 1 x HDMI®, 1 x GbE
- 8 x USB 3.1, 1 x Type C USB 3.1 / 2.0 (OTG), 1 x USB 2.0
- 1 x RS232 (OEM to RS422)
- 1 x M.2 M key, 1 x M.2 B key, 1 x Nano SIM (OEM)
- URAT, I2S, 2 x I2C

■ Specifications :

■ CPU

- 8-core Arm® Cortex®-A78AE 2.0 GHz
- 6-core Arm® Cortex®-A78AE 1.5 Ghz

■ GPU

- 1024-core NVIDIA Ampere architecture GPU with 32 Tensor Cores
- 512-core NVIDIA Ampere architecture GPU with 16 Tensor Cores

■ AI Accelerator

- NVIDIA Jetson Orin NX: 70 / 100 TOPs
- NVIDIA Jetson Orin Nano(Super): 20 / 40 TOPs

■ System Memory

- Jetson Orin NX: LPDDR5, 8 / 16GB
- Jetson Orin Nano(Super): LPDDR5, 4 / 8GB

■ Storage

- 1 x M.2 M key Type 2242 (PCIe x 4), NVMe

■ Display

- 1 x HDMI®

■ LAN

- 1 x GbE (RJ45)

■ Expansion Interface

- 1 x M.2 M key Type 2242 (PCIe x 4), NVMe
- 1 x M.2 B key Type 2242 / 3042 (PCIe x 2 / USB 2.0) (OEM To USB3.1 / 2.0) ;
- 1 x Nano SIM (OEM)

■ USB

- 8 x USB 3.1 Type A(external) ;
- 1 x Type C USB 3.1 / 2.0 (OTG)
- 1 x USB 2.0 (internal)

■ Serial IO

- 1 x RS232 (OEM Option RS422)

■ URAT, I2C, I2S

- 1 x URAT (internal)
- 2 x I2C (internal)
- 1 x I2S (internal)

■ Power Input

- DC-IN +9V~24V

■ Dimension

- 85 x 83 mm ; Weight: 80g

■ Operation Temperature

- 25°C~60°C (100 % CPU Usage)

■ Operation Humidity

- 5~95%, non-condensing

■ Chassis (OEM I/O Expansion by request)

- Box PC: FOX

■ OS Support

- JetPack 6.2 Ubuntu 22.04.05

Specification are subject to change without prior notice. ODM / OEM is available.