

CL210F + CN073

M.2 to 4 Port Intel I210-IS Fiber LAN converter set

Introduction:

M.2 to 4 x Intel® I210-IS Fiber LAN board
(Pair combination which connects via customized cable)

TOP



CL210F



CN073-S3


Features:

- Support PCIe slot by one for PCI Express Gen2 or Gne1
- PCI Express switch use Pericom PI7C9X2G608GP of PCI Express Gen 2 switching
- Fiber LAN Chipset INTEL I210-IS

Specification:

Type	4 x Fiber LAN (CL210F) M.2 2242 B+M key to PCIe signal (CN073)
Interface	30 pin SSL connector
Operating Temperature	-40°C ~ +85°C
Ethernet	4 x Fiber LAN PoE
Dimensions	93 x 80 mm (CL210F) 22 x 42 mm (CN073)

Mechanical Drawing:

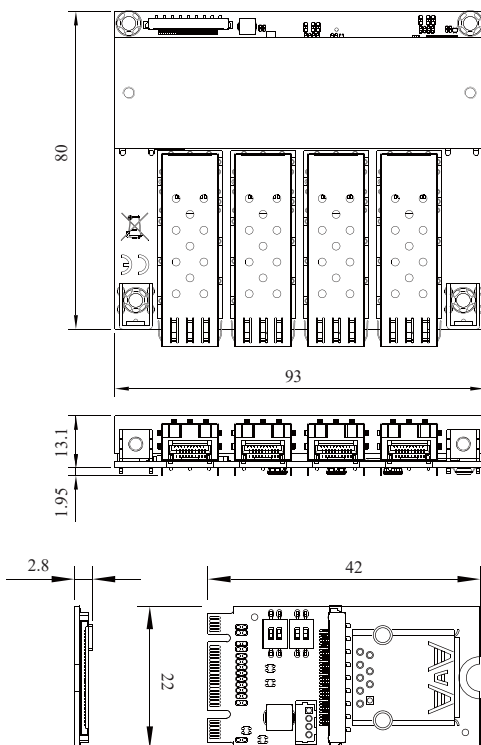


CN073-S3

Ordering Information:

6G9103-0017001-0 CL210F-001
6G9101-0106001-0 CN073-S3-001

Cable information:

6G6002-8068-0100 SSL20-30SSB-020-B+T1P, L=20cm

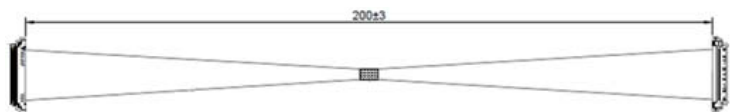

Specification are subject to change without prior notice. ODM / OEM is available.