


2I130DW

2.5" Plus Embedded SBC supports

13th Gen Intel® Core™ Raptor Lake U i7 / i5 / i3 CPU

12th Gen Intel® Core™ Alder Lake U i7 / i5 / i3 CPU


1 x HDMI®, 1 x eDP, 4 x Intel 2.5Gb Ethernet, 2 x M.2, 1 x Nano SIM
4DI / 4DO, 3 x USB 3.2, 4 x USB 2.0, 2 x COM

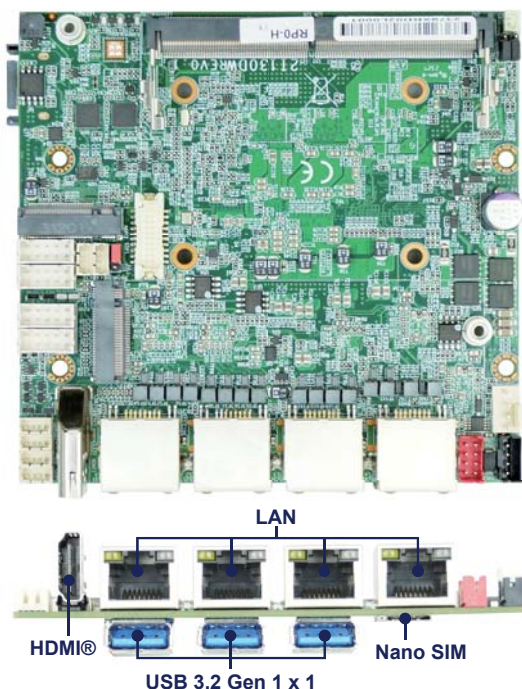

Features:

- 13th Gen Intel® Core™ Raptor Lake U i7 / i5 / i3 CPU
12th Gen Intel® Core™ Alder Lake U i7 / i5 / i3 CPU
- 1 x DDR5 SODIMM (Max. 32GB)
- Multiple Independent display: HDMI®, eDP
- 4 x Intel 2.5 GbE LAN, 3 x USB 3.2 Gen 1 x 1 (type A), 4 x USB 2.0
- 2 x COM, 4DI/4DO, *2 x M.2, 1 x Nano SIM
- TPM 2.0

Dimensions: (Unit:mm)

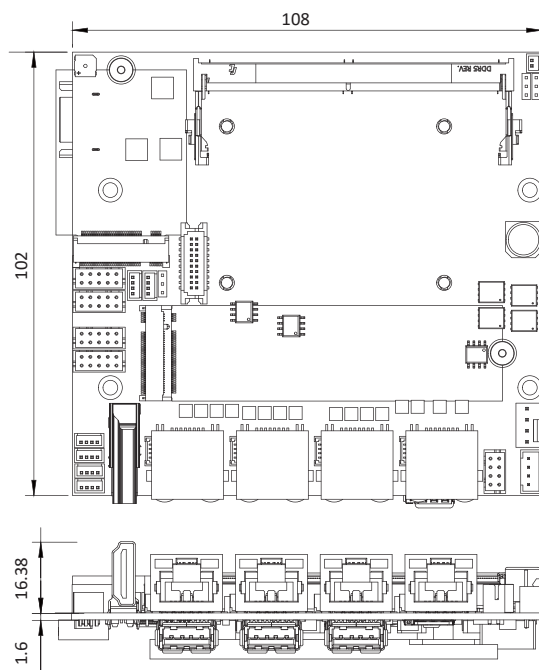

Specifications :

- CPU
13th Gen Intel® Core™ Raptor Lake U i7 / i5 / i3 CPU
12th Gen Intel® Core™ Alder Lake U i7 / i5 / i3 CPU
- MB Chipset
Intel® Raptor Lake / Alder Lake SoC
- Graphics
Intel UHD Graphics
- System Memory
1 x DDR5 5200 / 4800 MHz SODIMM, Max 32GB
- Storage
1 x SATA port
1 x M.2 M key Type 2280, Support NVMe SSD, SATA SSD
1 x M.2 B key Type 2242 / 3042, Support NVMe SSD
- BIOS
AMI UEFI BIOS
- Display
1 x HDMI®, 1 x eDP
- TPM
TPM 2.0
- LAN
4 x Intel 2.5 GbE I226-IT (external)
- Expansion Interface
1 x M.2 M key Type 2280 (SATA / PCIe x 4), Support NVMe
1 x M.2 B key Type 2242 / 3042 (PCIe x2 / USB 3.2 / 2.0), 1 x Nano SIM

Expansion Options

CN064	M.2 B+M key 2242 to M.2 E Key 2230, WiFi 6 + BT
CN067	M.2 B key 2242 to M.2 B Key 2252, 4G / 5G (3.7V by BOM Control)
CN059	USB to Line-out / Mic-in
CC007	USB to 4 port COM
CIO116G	SMBus to 8DI + 8DO
PW351	1 port PoE PSE
PW352	2 port PoE PSE
PW301	802.3AF / AT PD module
PW205	Wide Range power board (9~36V) with power Ignition on/off delay
PW206	12V / 24V DC to DC Redundant Power Board
PW022	Wide Range power board (24V / 48V)
DP001	eDP to VGA
eDP003	eDP to DVI
eDP004	eDP to HDMI®
eDP001	eDP to LVDS (OEM)

- USB
3 x USB 3.2 Gen 1 x 1 (Type A-external)
4 x USB 2.0 (internal)
- Serial IO
2 x RS232 / 422 / 485 (internal)
*COM1, COM2 pin9 5V / 12V (Option)
- GPIO
Hardware digital Input & Output, 4 x DI / 4 x DO
- SMBus / I²C
1 x SMBus / I²C
- WDT
Hardware Watch Dog Timer, 0~255 sec programmable
- Power Input
Wide Range DC IN +9~36V
- Dimension
2.5" Plus (108 x 102 mm) ; Weight: 115g
- Operation Temperature (100% CPU Usage)
-20°C ~ +70°C (under specific environmental & CPU power consumption conditions)
-40°C ~ +70°C (1315URE / 1345URE / 1365URE)
- Operation Humidity
5~95%, non-condensing
- Chassis (OEM I/O Expansion by request)
SKY 2
- OS Support
Windows® 10 IOT ; Windows® 11 IOT
Ubuntu 24.04.1 LTS, kernel 6.8.0-41-generic

Specification are subject to change without prior notice. ODM / OEM is available.