


2NOR01

Carrier Board for NVIDIA®
Jetson Orin™ Nano (Super) / NX SoM

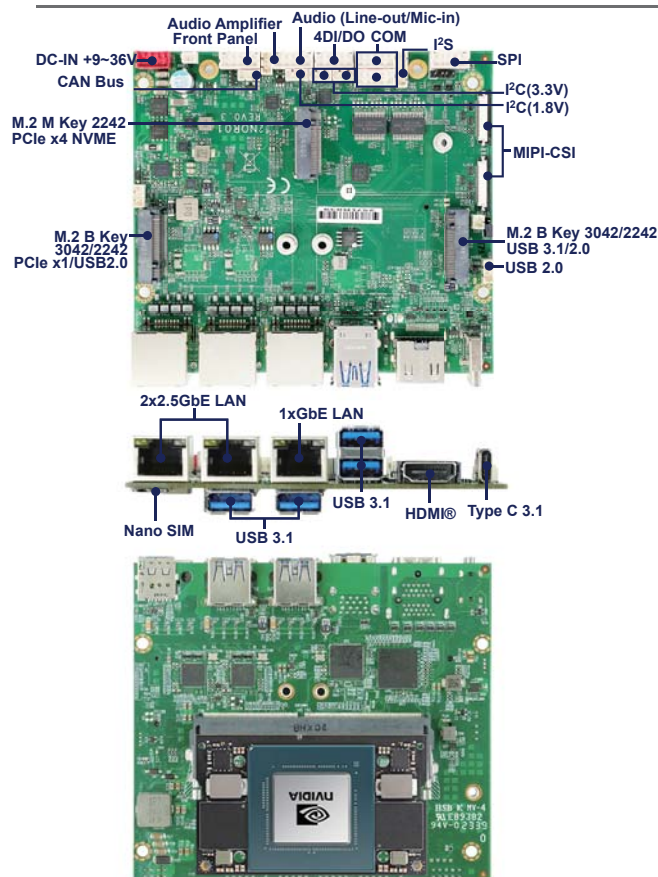


Features:

CPU Board:

- NVIDIA Jetson Nano (Super): 4 / 8GB LPDDR5, 20 / 40 TOPs
- NVIDIA Jetson NX: 8 / 16GB LPDDR5, 70 / 100 TOPs
- AI Accelerator: NVIDIA® Jetson Orin™ Nano (Super) / Orin™ NX

- 1 x HDMI® 2 x 2.5GbE, 1 x GbE
- 4 x USB 3.1, 1 x Type C USB 3.1 / 2.0 (OTG), 1 x USB 2.0
- Mic-in / Line-out ; AMP 2W
- 2 x RS232 (Option RS422), 1 x CANBus
- 1 x M.2 M key 2 x M.2 B key, 1 x SIM, 4DI / 4DO
- SPI, I2S, I2C, USB 2.0, 2 x MIPI-CSI

Dimensions: (Unit:mm)

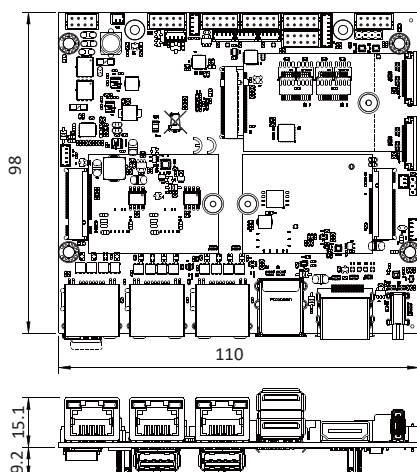

Specifications :

- CPU
 - 8-core Arm® Cortex®-A78AE 2.0 GHz
 - 6-core Arm® Cortex®-A78AE 1.5 GHz
- GPU
 - 1024-core NVIDIA Ampere architecture GPU with 32 Tensor Cores
 - 512-core NVIDIA Ampere architecture GPU with 16 Tensor Cores
- AI Accelerator
 - NVIDIA Jetson Orin NX: 70 / 100 TOPs
 - NVIDIA Jetson Orin Nano (Super): 20 / 40 TOPs
- System Memory
 - Jetson Orin NX: LPDDR5, 8 / 16GB
 - Jetson Orin Nano (Super): LPDDR5, 4 / 8GB
- Storage
 - 1 x M.2 M key Type 2242, Support NVMe SSD
- Display
 - 1 x HDMI®
- LAN
 - 1 x GbE LAN
 - 2 x Intel 2.5 GbE I226-IT
- Audio
 - Support Line-out / Mic-in
 - Two channel Class D Audio Amplifier 2W
- Expansion Interface
 - 1 x M.2 M key Type 2242 (PCIe x 4), NVMe
 - 1 x M.2 B key Type 2242 / 3042 (PCIe x 1 / USB 2.0) ; WiFi / Bluetooth or PCIe
 - 1 x M.2 B key Type 2242 / 3042 (USB 3.1 / 2.0) ; 4G / 5G, GPS or USB Device
 - 1 x SIM

Expansion Options

NF212A	M.2 B + M Key 2242 PCIe to GbE LAN
NF212B	M.2 B + M Key 3042 PCIe to Dual GbE LAN
PW353	4 port PoE Out (RJ45)
PW354	4 port PoE Out (M12)
NF226A	M.2 B + M Key 2242 PCIe to 2.5G LAN
NF226B	M.2 B + M Key 3042 PCIe to Dual 2.5G LAN
CC007	USB to 4 x RS232 / 485 / 422

- USB
 - 4 x USB 3.1 (external) ; 1 x USB 2.0 (internal)
 - 1 x USB 3.1 / 2.0 (Type C, OTG)
- Serial IO
 - 2 x RS232 (Option RS422)
 - 1 x CANBus
- SPI, I2C
 - SPI, I2S, I2C
- Camera interface
 - 2 x MIPI-CSI
- GPIO
 - Hardware digital Input & Output, 4 x DI / 4 x DO
- Power Input
 - Wide Range +9~36V
- Dimension
 - 2.5" Plus (110 x 98 mm) ; Weight: 100g
- Operation Temperature (100% CPU Usage)
 - 25°C~70°C (100% CPU Usage, not-underclocking)
- Operation Humidity
 - 5~95%, non-condensing
- Chassis (OEM I/O Expansion by request)
 - SKY 2, ROCK
- OS Support

JetPack 6.2 Ubuntu 22.04.05

Specification are subject to change without prior notice. ODM / OEM is available.