



SHARK 10.1" PPC

10.1" Fanless Panel PC with Intel® Atom™ Bay Trail Processor

Features:

- 10.1" LCD with resistive touch screen
- Intel® Atom™ Bay Trail J1900 / E3825 / E3845 SoC
- DDR3L 2GB / 4GB on board
- 2 x GbE, 1 x COM, VGA, 4 x USB
- Wide Range 9~36V DC input
- Aluminum housing

Specifications :

Motherboard	2I385CW
CPU	Intel® Atom™ Bay Trail E3845 1.91 GHz (Quad Core)
Chipset	Intel Bay Trail SoC
Memory	DDR3L 4GB integrated
Storage	mSATA, HDD / SSD*
Expansion slots	1 x Full-size Mini PCIe (PCIe / USB / mSATA) 1 x Half-size Mini PCIe (USB / mSATA)
I/O ports	Network 2 x Intel GbE USB 4 x USB 2.0 Serial ports 1 x RS232 Display 1 x VGA
Optional Modules & Function	GPS, Bluetooth, PoE, WiFi, 4G LTE, Isolated COM, battery UPS *SATA Kit, *VESA Mount Kit, * External power adapter
Certification	CE / FCC
OS Support	Windows® 10 IOT (64bit), Windows® 8.1 (64bit), Windows® Embedded 8 Standard (64bit), Windows® 7 (32 / 64bit), Windows® Embedded Sta 7 (32 / 64bit), Ubuntu 14.10 above, Fedora 25 above, Debian 8 above, CentOS 7.3 above, Mint 18.1 above

Mechanical

Dimensions	249.56W x 168.2D x 40H mm
Weight	2.3 kg
Mounting	VESA mount & Stand (optional)

Power

DC input	+9~36V
AC input	External adapter 100 / 240V, AC-DC (optional)



LCD Display & Touch

Display Type	10.1 inch 16:9
Max. Resolution	1280 x 800
Viewing Angle	85(U) 85(D) 85(R) 85(L)
Luminance (cd/m2)	300
Contrast Ratio	1300:1
Touch Type	Resistive Touch Screen

Environment

Operating Temp. (100 % CPU usage)	-20°C to +60°C with mSATA / SSD 0°C to +50°C with HDD
Storage Temp.	-20°C to +70°C
Relative Humidity	95% @ 40°C, non-condensing
IP Rating	Front panel IP65 Compliant

Dimension

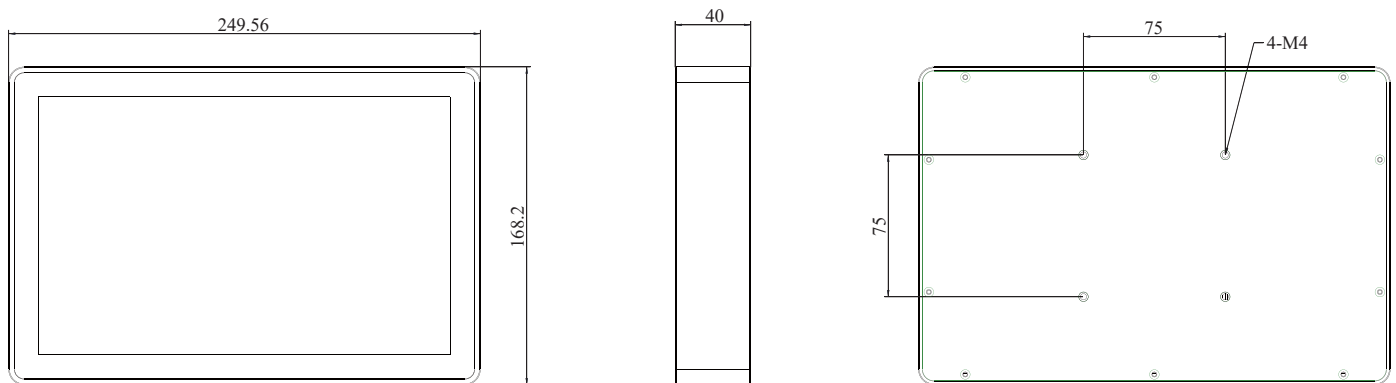

2I385CW

Specification are subject to change without prior notice. ODM / OEM is available.