


CI370D


Industrial SBC supports 8th / 9th Gen Intel® Coffee Lake-S, i9 / i7 / i5 / i3, Pentium / Celeron CPU, Intel® Q370 chipset
 DP, HDMI, eDP, 9 x Intel Gb Ethernet, 2 x Fiber, 11 x USB, 2 x COM, 8DI / 8DO, 2 x Mini PCIe, 1 x PCIe, 2 x SIM, 1 x M.2, SMBus

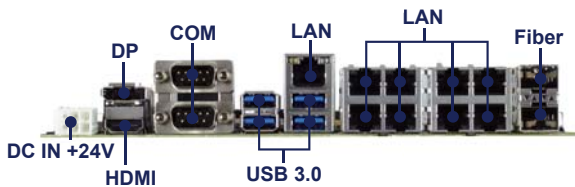

Features:

- 8th / 9th Gen Intel® Coffee Lake-S, i9 / i7 / i5 / i3 / Pentium / Celeron CPU
- Intel® Q370
- 2 x DDR4 2400 MHz SODIMM, Max. 64GB
- Multiple Independent display: DP, HDMI & eDP
- 9 x Intel GbE LAN, 2 x Fiber, 4 x USB 3.1, 7 x USB 2.0, 8DI / 8DO
- 2 x COM, 2 x Mini PCIe, 1 x PCIe, 2 x SIM, 1 x M.2, SMBus
- TPM 2.0

Dimensions: (Unit:mm)

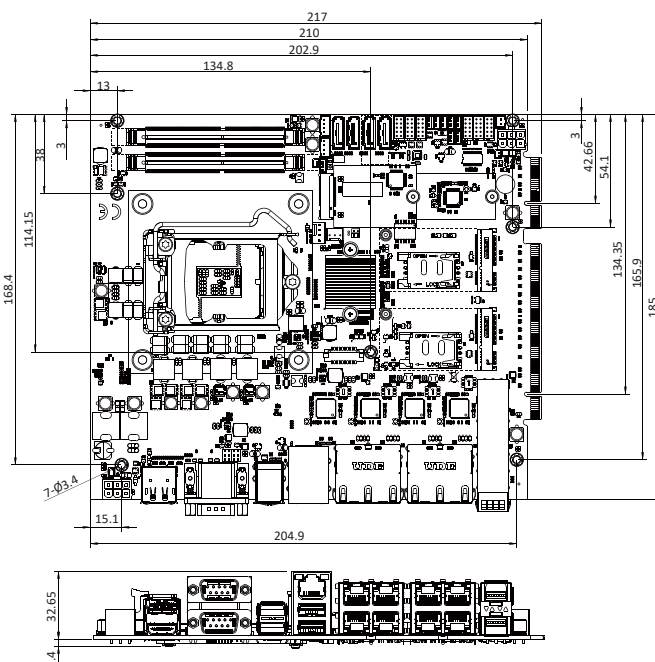

Specifications :

- CPU
8th / 9th Gen Intel® Coffee Lake-S, i9 / i7 / i5 / i3 / Pentium / Celeron CPU
- MB Chipset
Intel® Q370
- Graphics
Intel® UHD Graphics, Support DirectX 12 & OpenGL 4.5
- System Memory
2 x DDR4 2400 MHz SODIMM, Max. 64GB
- Storage
4 x SATA ports 3.0 Data transfer rates up to 6.0 Gb/s (600 MB/s)
2 x mini card socket for mSATA
1 x M.2 B Key, Type 2280 (PCIe / USB)
- BIOS
AMI UEFI BIOS
- Display
1 x DP, 1 x HDMI, eDP
- TPM
TPM 2.0
- LAN
1 x Intel GbE I219LM (external), 8 x Intel 2.5 GbE I225-V (external)
- Fiber
2 x Intel I210IS Fiber 10 / 100 / Giga bit
- Audio (OEM)
High Definition Audio Specification, Support Line-out / Mic-in / Line-in
- Expansion Interface
1 x Full size Mini PCIe (PCIe / mSATA / USB)
1 x Full size Mini PCIe (PCIe / mSATA / USB)
1 x PCIe x 16 / x 8 golden finger (PCIe x 16 + PCIe x 4 Signal)
1 x M.2 B Key, Type 2280 (PCIe / USB)
2 x SIM

Expansion Options

CN064	M.2 B key 2242 to M.2 E Key 2230, WiFi 6 + BT
CN067	M.2 B key 2242 to M.2 B Key 2252, 4G / 5G (3.7V by BOM Control)
CN059	USB to Line-out / Mic-in
CC007	USB to 4 port COM
CIO116G	SMBus to 8DI + 8DO
PW351	1 port PoE PSE
PW352	2 port PoE PSE
PW301	802.3AF / AT PD module
PW205	Wide Range power board (9~36V) with power Ignition on/off delay
PW206	12V / 24V DC to DC Redundant Power Board
DP001	eDP to VGA
eDP003	eDP to DVI
eDP004	eDP to HDMI
eDP001	eDP to LVDS (OEM)

- USB
4 x USB 3.1 (external), 7 x USB 2.0 (internal)
- Serial IO
2 x RS232 / 422 / 485 (external)
*COM1, COM2 pin9 5V / 12V selectable by jumper
- GPIO
Hardware digital Input & Output, 8 x DI / 8 x DO
- SMBus
1 x SMBus
- WDT
Hardware Watch Dog Timer, 0~255 sec programmable
- Power Input
DC IN +24V
- Dimension
217 x 185 mm
- Operation Temperature (100 % CPU Usage)
-20°C~70°C (Core i7 8700T / i7 8700)
- Operation Humidity
5~95%, non-condensing
- Chassis (OEM I/O Expansion by request)
Box PC: TWISTER, TINO, 1U
- OS Support
Windows® 10 IOT ; Windows® 11 IOT
Ubuntu 22.04 above, Fedora 36 above

Specification are subject to change without prior notice. ODM / OEM is available.